



MP

RÉSEAU
ON
GPL





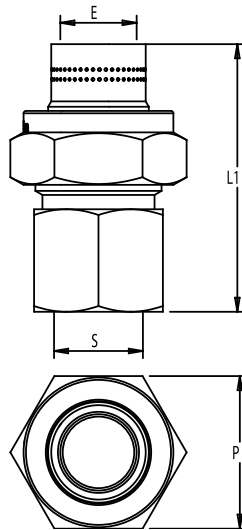


ERP

RACCORD 3 PIÈCES FEMELLE CYLINDRIQUE (À JSC) À BRASER SUR CUIVRE



CARACTÉRISTIQUES TECHNIQUES

Température : -20°C à +60°C

CALIBRE	ENTRÉE CU (E)	SORTIE FEMELLE (S)	L1	P	MARQUE	RÉF.
15	Cu Ø 16	Cylindrique 1/2"	56	32		2600-070
15	Cu Ø 18	Cylindrique 1/2"	58	32		2600-071
20	Cu Ø 22	Cylindrique 3/4"	58	41		2600-072
25	Cu Ø 28	Cylindrique 1"	68	50		2600-073
32	Cu Ø 35	Cylindrique 1 1/4"	80	55		2600-074
40	Cu Ø 42	Cylindrique 1 1/2"	82	70		2600-076
50	Cu Ø 54	Cylindrique 2"	97	75		2600-077